




29

SPECIFICATIONS:

Length:	30' 11"
Beam:	9' 6"
Weight:	7,400 lbs.
Draft:	18" (min)
Maximum HP:	700 hp.
Fuel:	250 gal.

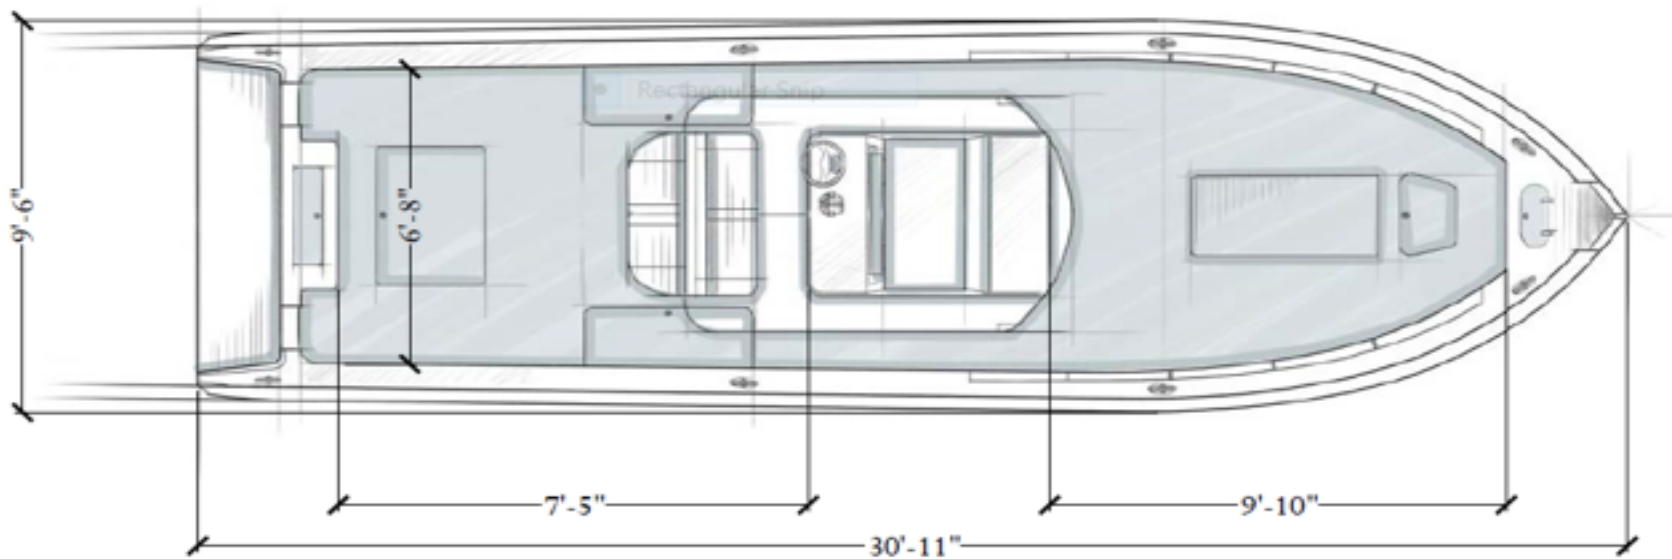

STANDARD EQUIPMENT:

Deep-V stepped hull design	2000 Gal/hr rule bilge pump
Hand laid fiberglass hull	Gemlux 2" gas fills
Impregnated core on running surfaces	4 Gunwale rod holders
Solid fiberglass at thru hulls	High performance trim tabs
Molded fiberglass structural "grid" foam filled	C-Zone switch panel
(3) piece structure glassed and mechanically fastened	Tinned copper wiring with Duetsch connectors
Vinylester resin throughout	50 gallon live well (transom) 80 gallon live well (LP)
Radiused corners	530 quart macerated fish box
Toe kicks	O Ring gutter system
Baffled aluminum fuel tanks	Gemlux stainless thru-hulls and ball valves
T-Top	Saltwater washdown
Gemlux flush mount cleats	Custom aluminum trailer
Stainless pop up bow light	Stainless steel propellers
Under gunwale courtesy lights	Factory binnacle controls
Console and combing cushions	Full factory instrumentation and fuel management
Under gunwale rod holders	Key switches and engine harnesses
1600 gal/hr rule baitwell pumps	Odessey-Discovery batteries w/Gill Offshore Trays
SS D-rings	Yellowfin battery management system

ENGINES:

Twin 250 Mercury Verado
Twin 300 Mercury Verado
Twin 350 Mercury Verado
Twin 400 Mercury Verado
Twin 250 Yamaha F-250
Twin 300 Yamaha